

Model A10

OEM Pressure Transmitter
Stainless steel pressure sensor
Mass production, automated calibration

Materontek
Sensing and Internet of Things

Features

- Measuring ranges from 350mbar to 200bar
- Gauge pressure
- Accuracy: $\pm 0.25\%$ FSO(Typ.), $\pm 0.5\%$ FSO(Max.)
- Calibrated and temperature compensated
- Stainless steel pressure sensor
- Output 4...20mA, DC1...5V, DC0.5...4.5V etc.



Application

- Hydraulic and pneumatic
- Machine building
- Pumps
- Water treatment
- IoT pressure measurement
- HVAC controls, Refrigeration
- Air compressors

Technical data

Performance

Accuracy*	$\pm 0.25\%$ FS@25°C(Typ.) $\pm 0.5\%$ FS@25°C(Max.)	*Linearity (best straight line) + Hysteresis + Repeatability
Operating Temperature	-10 to 70°C	
Compensated Temperature Range	0 to 70°C	
Vibration	10 g RMS(20 to 2000Hz)	
Shock	100 g(11ms)	
Cycles	10x10 ⁵	
Long Term Stability	$\pm 0.3\%$ FS/year	

Electrical @25°C

Output signal / Supply	2-wire 4...20mA / V _S = 10... 30VDC
	3-wire 1...5VDC / V _S = 12... 30VDC
	3-wire 0...5VDC / V _S = 12... 30VDC
	3-wire 0...10VDC / V _S = 12... 30VDC
	3-wire 0.5...4.5VDC / V _S = 12... 30VDC
	3-wire 0.5...4.5VDC ratiometric / V _S = 5VDC
Insulation Resistance	100 MΩ@100VDC
EMC Test	IEC61000-4-2/IEC61000-4-3
Reverse polarity protection	No damage – no function

Physical Specifications

Housing	316L stainless steel
Diaphragm	316L stainless steel
Oil Filling	Silicone oil
Protection	IP65
Sealing	NBR (Permissible temperature range: -30 to 85°C) FKM (Permissible temperature range: -10 to 85°C) Copper (Permissible temperature range: -30 to 85°C)
Weight	~140g


The listed specifications and dimensions are subject to change without prior notice

Model A10

OEM Pressure Transmitter
Stainless steel pressure sensor
Mass production, automated calibration

Materontek
Sensing and Internet of Things

Dimensions (All dimensions in mm)

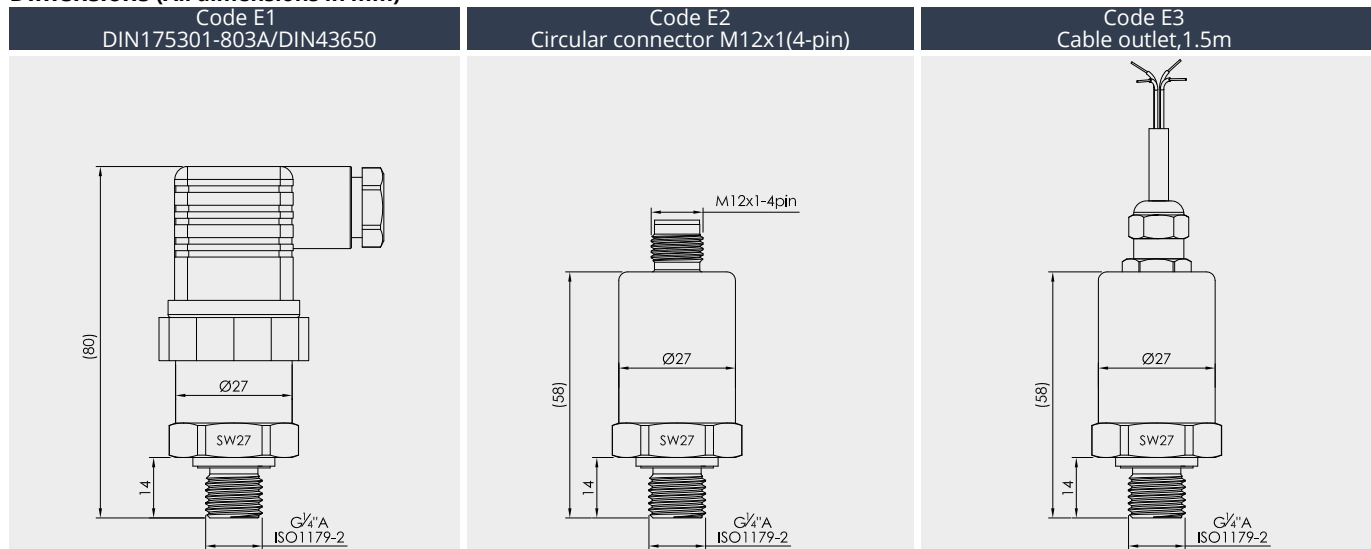

Electrical connections

DIN175301-803-A	4...20mA 2-wire	1...5VDC 3-wire	0.5...4.5VDC 3-wire
+Vcc	1	1	1
OUT	2	3	3
GND	NA	2	2

Connector M12x1(4-pin)	4...20mA 2-wire	1...5VDC 3-wire	0.5...4.5VDC 3-wire
+Vcc	1	1	1
OUT	3	3	3
GND	NA	2	2

Measuring ranges, gauge pressure

Code	Nominal pressure [bar]	Overpressure limit [bar]
01	0...0.35	1
02	0...0.6	1.8
03	0...1	3
04	0...1.6	3
05	0...2.5	5
06	0...3	6
07	0...4	8
08	0...6	12
09	0...10	20
10	0...16	30
11	0...25	50
12	0...30	60
13	0...40	80
14	0...60	120
15	0...100	200
16	0...160	200
17	0...200	250

Measuring ranges, absolute pressure

Code	Nominal pressure [bar]	Overpressure limit [bar]
18	0...0.4	1
19	0...0.6	1
20	0...1	2
21	0...1.6	3
22	0...2.5	5
23	0...4	10
24	0...6	10
25	0...10	20
26	0...16	30
27	0...25	50

Vacuum and +/- measuring ranges

Code	Nominal pressure [bar]	Overpressure limit [bar]
28	-1...0	1.5
29	-1...+1	2
30	-1...+1.6	3
31	-1...+2.5	4
32	-1...+3	5
33	-1...+4	6
34	-1...+5	10
35	-1...+6	12
36	-1...+9	15
37	-1...+10	20
38	-1...+16	30
39	-1...+25	40
40	-1...+30	50
41	-1...+40	60
42	-1...+60	100

Model A10

OEM Pressure Transmitter
Stainless steel pressure sensor
Mass production, automated calibration

Materontek
Sensing and Internet of Things

Ordering code

Model	Measuring range	Type	Output	Pressure Port	Electrical Connection
A10	Range Code	G Gauge	E1 4...20mA	01 G¼A ISO9974-2	E1 DIN175301-803A
	99 Custom	A Absolute	E2 DC 1...5V	02 G½A ISO9974-2	E2 M12 connector
			E3 DC 0...5V	03 G¾A ISO9974-2	E3 Cable outlet,1.5m
			E4 DC 0...10V	04 G¼A ISO9974-2 with damper	
			E5 DC 0.5...4.5V ratiometric	05 G½A ISO9974-2 with damper	
			E6 DC 0.5...4.5V	06 G¾A ISO9974-2 with damper	
				07 G½B EN837	
				08 G¼B EN837	
				09 G½B EN837	
				10 M20x1.5 EN837	
				11 G½ Female EN837	
				12 G¼ Female EN837	
				13 R¼ ISO7	
				14 R¾ ISO7	
				15 R½ ISO7	
				16 PT¼ KS	
				17 PT¾ KS	
				18 PT½ KS	
				19 M12x1.5 ISO9974-2	
				20 M14x1.5 ISO9974-2	
				21 M20x1.5 ISO9974-2	
				22 M20x1.5 ISO9974-2 with damper	
				23 ½NPT ANSI/ASME B1.20.1	
				24 ¼NPT ANSI/ASME B1.20.1	
				25 ½NPT ANSI/ASME B1.20.1	
				26 ½NPT Female ANSI/ASME B1.20.1	
				27 ¼NPT Female ANSI/ASME B1.20.1	
				28 ½NPT Female ANSI/ASME B1.20.1	
				29 7/16-20UNF-74° SAE J514E	

Accuracy	Lable	Accessories
05 0.5%FS	S Standard	MC1 Straight circular connector M12 x 1, 4-pin,With 2 m cable
	N Neutral packing	MC2 Straight circular connector M12 x 1, 4-pin,With 5 m cable
	C Custom label	MC3 Angled circular connector M12 x 1, 4-pin,With 2 m cable
		MC4 Angled circular connector M12 x 1, 4-pin,With 5 m cable