

Model DP-4

LED digital display
Input 4...20mA/DIN43650 installation

Materontek
Sensing and Internet of Things

Features

- ❑ 2-wire LED display
- ❑ No external power supply required
- ❑ The minimum operating current: 3mA
- ❑ Four-digit LED, display resolution 1/9999
- ❑ Display physical amount: pressure, temperature, flow etc.
- ❑ Standard DIN43650 electrical connection




Technical data

Performance	
Display range	-1999 to 9999
Display method	LED
Accuracy	±0.1%±1(typ.)
Power supply	Not required, 4 to 20mA loop powered
Acquisition resolution	16-bit binary code
Polarity protection	Internal reverse polarity protection
Voltage drop	<4.5VDC
Operating temperature	-20 to 70 °C
Protection	IP65

The listed specifications and dimensions are subject to change without prior notice

Dimensions (All dimensions in mm)

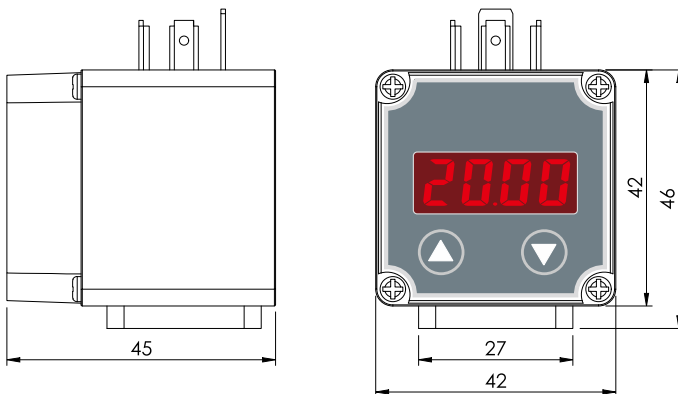

Ordering code

Model	Input/output	Label
DP-4	N 4~20mA/4~20mA(standard)	N Neutral packing
	C 4~20mA/4~20mA+Optocoupler alarm	C Custom label
		S Standard

